



FALL ARRESTORS

A range of retractable lifelines that reduces the shock loading on the body by limiting the distance of fall. Used in work inspection, general construction, maintenance, oil production, telecommunications, mining and confined work areas.

HARU® Fall Arrestors provide continuous protection against falls. The Fall Arrestor automatically extends and retracts to allow freedom of movement. Each unit includes anchorage ropes.

HARU® Fall Arrestors are manufactured in a ISO 9001:2008 factory and all products are CE approved.



Patented Safety Mechanism



FAHB06N



FAHB10

FAHB06



FAHB15



FAHB20

SPECIFICATIONS - FALL ARRESTORS - EN360 APPROVED

| Model Number | Type | Length (m) | Weight (kg) |
|--------------|-----------------|------------|-------------|
| FAHB03.5N | Nylon Webbing | 3.5 | 1.6 |
| FAHB06N | Nylon Webbing | 6 | 1.6 |
| FAHB06 | Steel wire rope | 6 | 4.5 |
| FAHB10 | Steel wire rope | 10 | 4.8 |
| FAHB15 | Steel wire rope | 15 | 6.6 |
| FAHB20 | Steel wire rope | 20 | 8.6 |


CAUTION!



Always read the instruction manual before use. Always wear the correct safety gear.

TRIPOD

FATPC

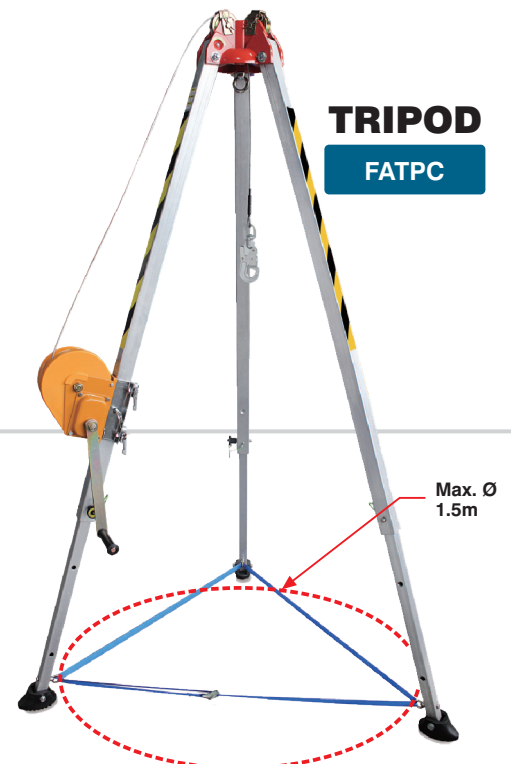

SPECIFICATIONS - TRIPOD - EN795 APPROVED

| Model Number | Material | Height (M) | Wire Dia. x Length | Safe Load (kg) | Weight (kg) |
|--------------|-----------|-------------|----------------------|----------------|-------------------|
| FATPC | Aluminium | 1.35 - 2.40 | 5mm x up to max. 30m | 100 | 20.0 (Excl. Rope) |

For confined space and rescue applications. Adjustable height. Additional cable pulley and point to attach to retractable lifeline. For manhole max. diameter 1.5m and under.